



REOLINE


Three phase AC power supplies with auto-windings

Type REOLINE AC-DS/ Power Range 0.47 kVA...3.50 kVA

This range of laboratory units, in a 19" enclosure is required by today's engineering industry for laboratory, test, factory and service applications. The output range is infinitely variable 3 x 0...450 V. A no volts output is provided when the unit is adjusted to the zero position. Units can be stacked to save space.

Specification:

- 3 M long mains cable with safety connector
- Mains switch
- Toroidal transformer with a true zero volts setting
- Analogue voltmeter and ammeter for output
- Laboratory-style, safety output sockets

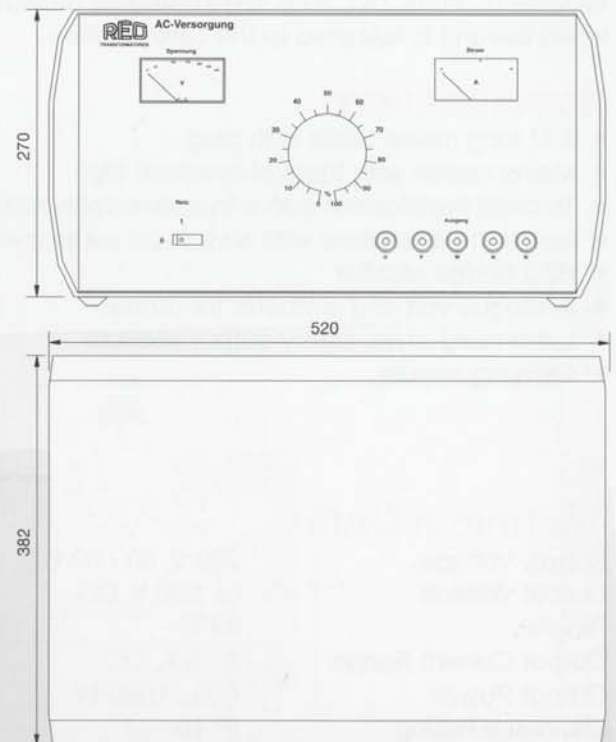

Technical Data:

Supply Voltage	: 3 x 400 V, 50 / 60 Hz
Output Voltage	: 3 x 0...450 V
Output Current Range	: 0.6...4.5 A
Output Power	: 0.47...3.5 kVA
Connection Group	: Stern Spar
Enclosure Rating	: IP 20
Max. Ambient Temperature	: + 40 °C
Relating Standards	: EN 61010-1 / VDE 0411 Part 1

Size	3 x 0 - 450 V		Weight kg
	3 x A	kVA	
DM3	0.6	0.47	8.5
DM4	0.85	0.66	10.5
DM5	1.2	0.93	11.5
DM6	2.0	1.56	13.5
DM61	2.8	2.19	14.5
DM7	3.0	2.34	17.5
DM8	4.5	3.50	20.5