

## Single-phase AC power supplies with separate windings



### Type REOLINE AC-G/ Power Range 0.78 kVA...2.08 kVA


These units have the same technical specification as the REOLINE AC-S, except that they have separate windings.

#### Specification:

- 2 M long mains cable with plug
- Mains switch with thermal overload trip
- Toroidal transformer with a true zero volts setting
- Isolation transformer with switch-on surge limiter
- Laboratory-style, safety output sockets
- Carrying handles

#### Technical Data:

Supply Voltage	: 230 V, 50 / 60 Hz
Output Voltage	: 0...260 V
Output Current Range	: 3...8 A
Output Power	: 0.78...2.08 kVA
Connection Group	: li0
Enclosure Rating	: IP 40
Max. Ambient Temperature	: + 40 °C
Relating Standards	: EN 61010-1 / VDE 0411 Part 1

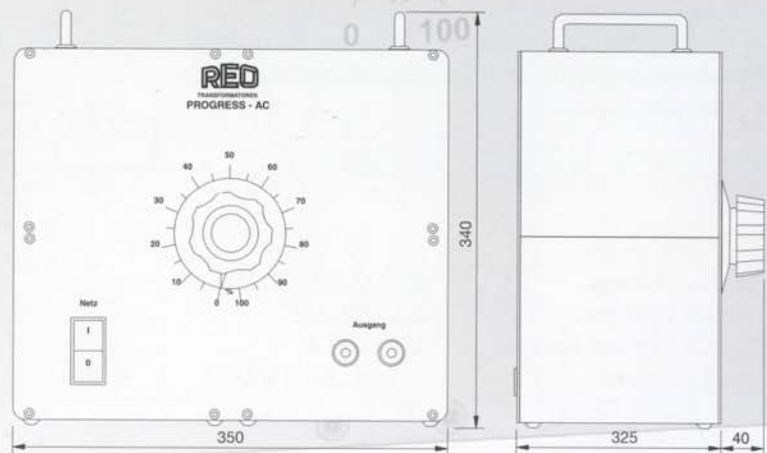

Size	0 - 260 V		Weight kg
	A	kVA	
M7	3	0.78	12.7
M8	4.5	1.17	16.1
M9	6	1.56	19.5
M10	8	2.08	24.5