



REOLINE

Type REOLINE DC-GL/ Power Range 120 W...560 W


This range of laboratory units is required by today engineering industry for **laboratory, test, factory** and **service** applications. The output range is infinitely variable 0...200V, DC. A no volts output is provided when the unit is adjusted to the zero position.

Specification:

- 2 M long mains cable with plug
- Illuminated mains switch
- Toroidal transformer with a true zero volts setting
- Isolation transformer with switch-on surge limiter
- B2U bridge rectifier
- Fused transformer secondary winding
- Analogue voltmeter and ammeter for output
- Laboratory-style, safety output sockets
- Carrying handle

Technical Data:

Supply Voltage	: 230 V, 50 / 60 Hz
Output Voltage	: 0...200 V, DC
Ripple	: 48%
Output Current Range	: 0.6...2.8 A, DC
Output Power	: 120...560 W
Enclosure Rating	: IP 40
Max. Ambient Temperature	: + 40 °C
Relating Standards	: EN 61010-1 / VDE 0411 Part 1

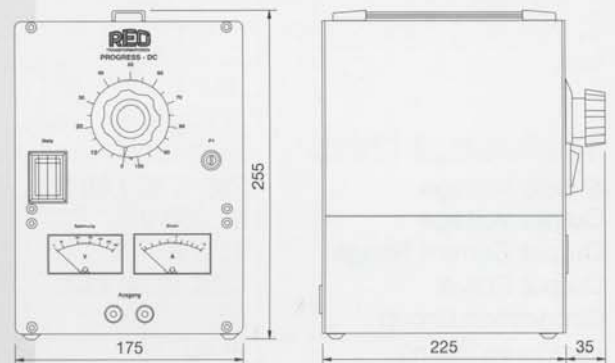

Size	0 - 200 V, DC		Weight kg
	A	W	
M3	0.6	120	5.5
M4	0.85	170	6.6
M5	1.2	240	7.6
M6	2.0	400	8.8
M61	2.8	560	9.6