



# REOLOAD

## Enclosed single-phase rotary rheostats

### Type REOLOAD


These rotary rheostats, in robust, aluminium housings, are used as loads in laboratory and test applications. A linear or stepped resistance range can be manufactured. The enclosures are portable and can be stacked to save space.

### Specification:

- Rotary rheostat
- Laboratory-style, safety output sockets
- Carrying handle

### Technical Data:

Resistance Value	: 1...10.000 L
Tolerance	: $\pm 10\%$ ( $\pm 5\%$ possible)
Load Current	: 0.03...13.6 A
Maximum Voltage	: 250 V
Enclosure Rating	: IP 20
Related Standards	: DIN 41473

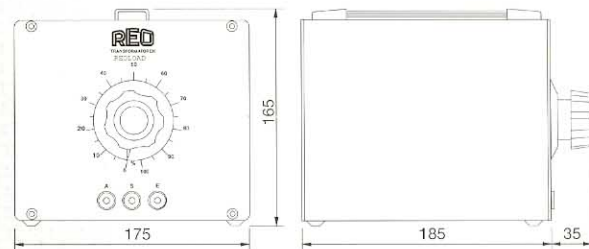

Size	Load W	Weight kg
R10	16	1.5
R20	35	1.6
R40	50	1.7
R75	100	1.8
R100	125	2.0
R150	180	2.3